

# Selection Guide for CNC Rotary Tables ...



pl

**HURCO**


10/2018 | EN



... for BX-, VM- and VMX-series

## Applications

CNC rotary tables for economical manufacturing:  
pL LEHMANN has suitable and rational solutions for  
nearly every industry

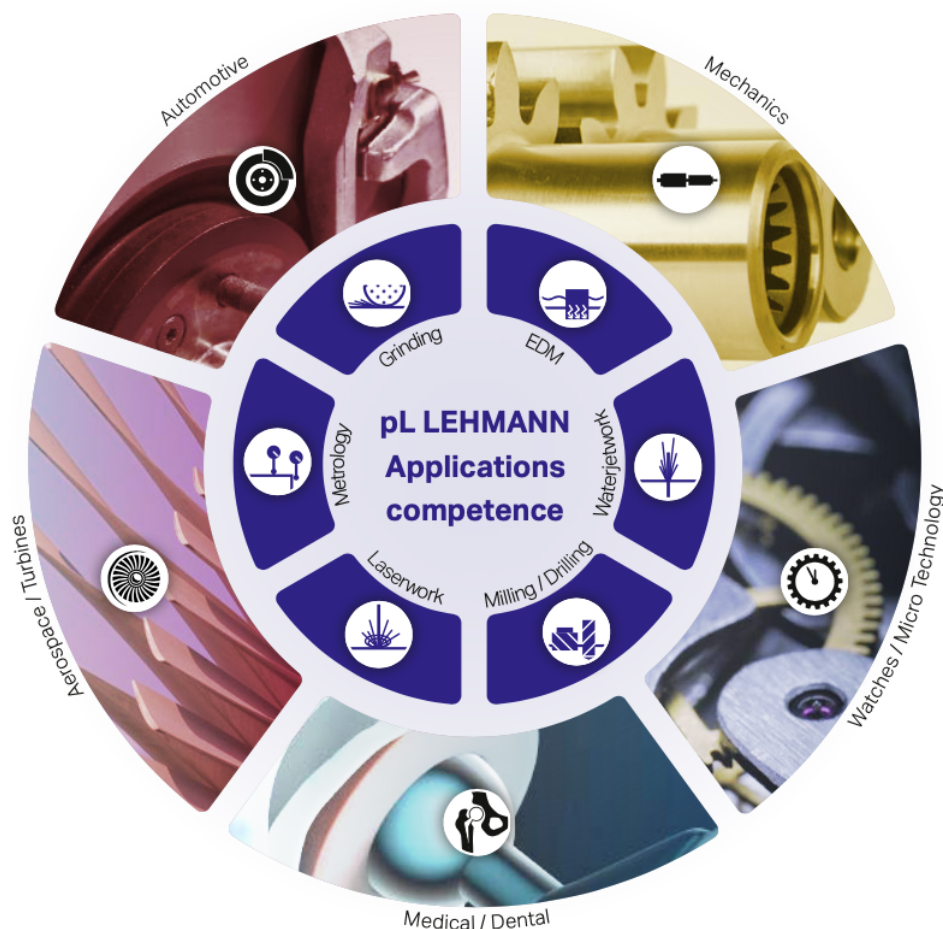


pL rotary tables in use: on over **40** different machine brands  
and over **160** different machine models.

pL competence: Integration in **all known** CNC control systems  
(Fanuc, Siemens, Heidenhain, Haas, Winmax, Mitsubishi, Brother,  
Mazatrol, Okuma ...), for new machines as well as for retrofits

## Organization

Professional products from professional partners:  
HURCO and pL LEHMANN provide  
first-class service to common customers

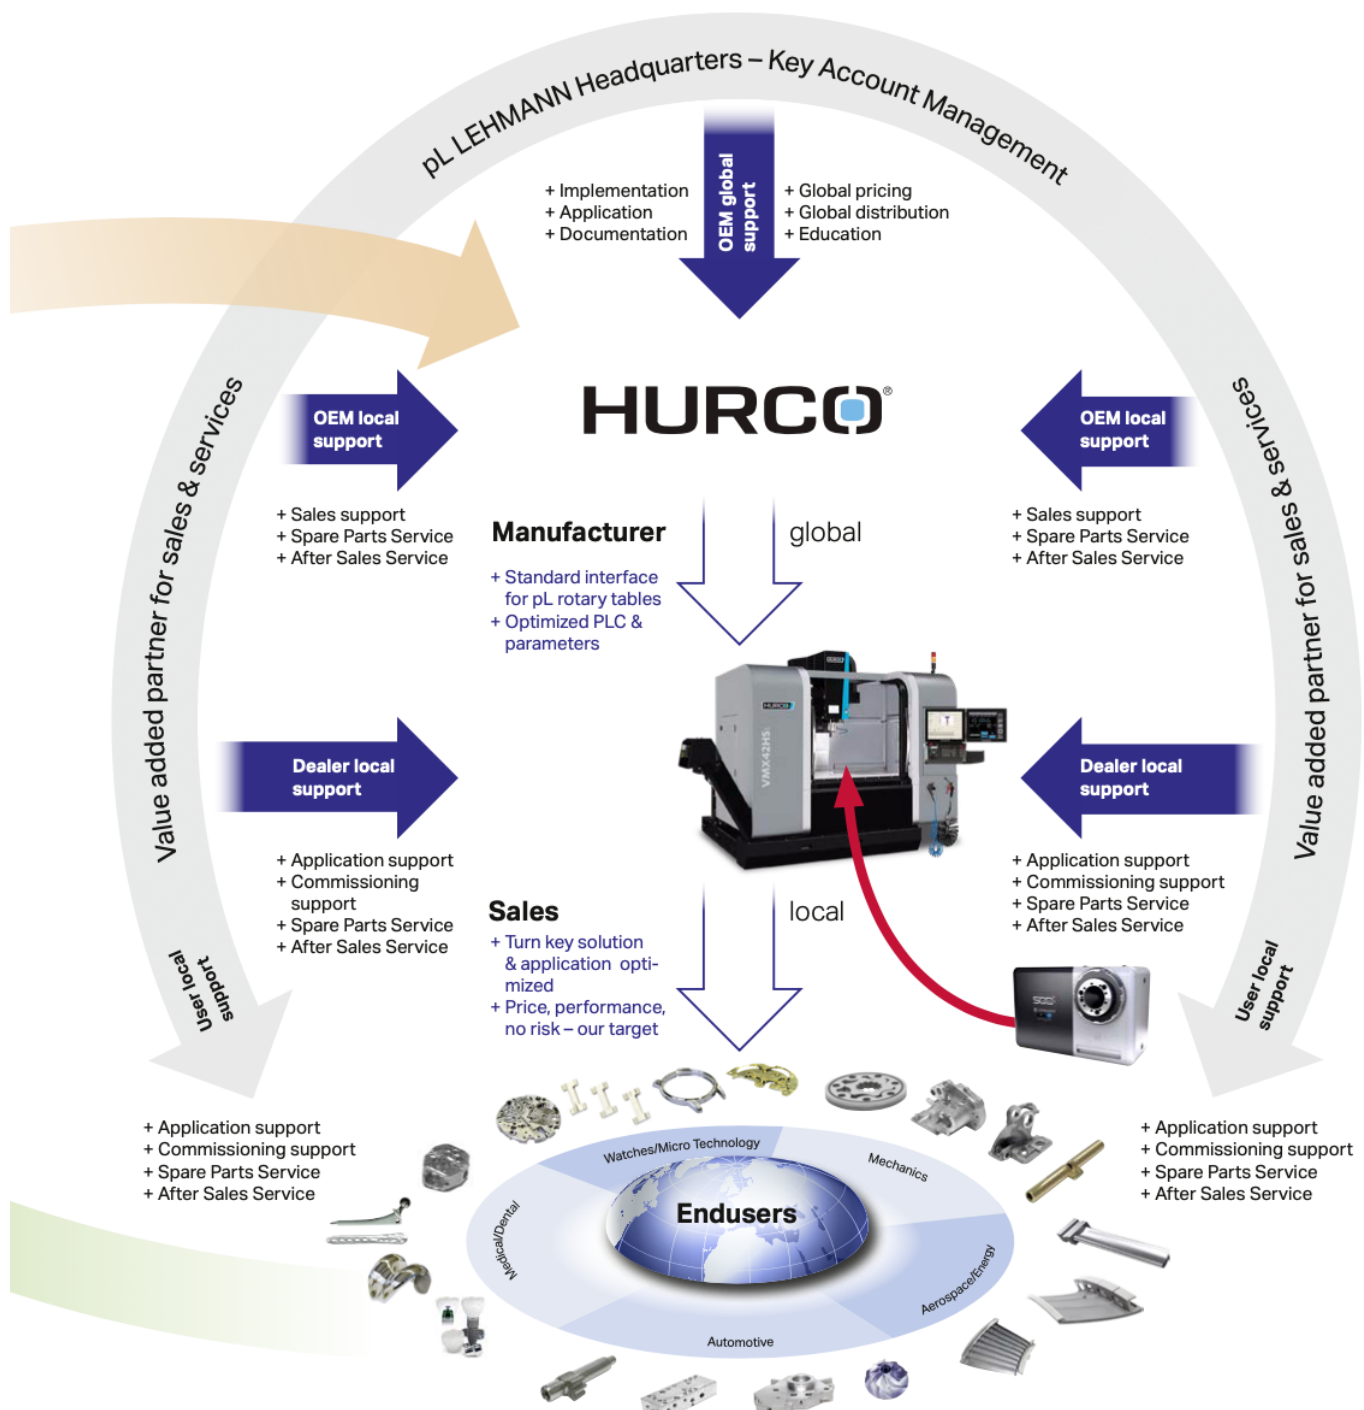

## Overview and Facts

Up to **210 rpm**  
up to **0.21 sec / 90°**

**NEW**  
up to +30 %

**High speed**

Extended travel in  
Z- and X-direction

**More space**

High spindle load,  
heavy-duty bearing

**Heavy duty**

## E-Series



**Rotary tables suitable for  
simultaneous operation!**

### Save energy



Benefits of PGD by pL LEHMANN as compared to Direct Drive: small servo, low power draw, no cooling system, and a significantly reduced energy consumption when machining with unclamped rotary table.

### Energy label at the left

An intuitive rating as consumption greatly depends on usage, and without any liability assumed, following the directives on energy labelling

**See main catalog  
for more features**

**High torque**

Feed torque up to  
**850 Nm** (provisional)

**Adaptability**

Multifunctional  
spindle HSK

**Precision**

On the workpiece, as  
precise as **2 µm / 100 mm**

**NEW**  
up to +30 %

## Overview and Facts

Pneum. clamping  
up to **7,000 Nm**

**High clamp**

**NEW**  
up to +150 %

Large parts  
up to **ø 500**

**Big size**

PGD backlash-free  
long-life gear unit

**No backlash**

## T-Series



**All base plates  
made of steel**

**NEW**

with integrated hole pattern for  
slot spacing of 100 and 125 mm,  
integrated alignment system  
**lineFIX** for lengthwise or cross-  
wise clamping.

## M-Series



**NEW**

**Connectivity**

Wireless monitoring,  
for operation & service

**No adjust**

Load change without  
parameter adjustment

**Less cost**

No cooling system,  
no hydraulics

## Machine Overview



BX 40i



VM 10HSi



VM 20i



VMX 30i




VMX 42HSi

### A word from HURCO:

#### «We care about your business

HURCO combines customer expertise with the industry's most powerful CNC control. Our CNC machine control, powered by WinMax CNC software, is the key to making job shops more profitable because it is designed to make small batch/high mix production efficient by reducing setup time and programming time.»

The right machine/rotary table combination for economical production: this Selection Guide helps you make the right selection

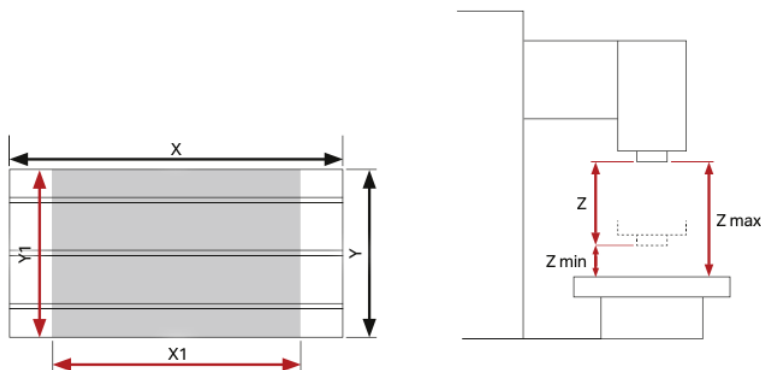[illegible]

\*\* The recommended rotary tables do not exceed 50 % of the allowed table load.


|        | EA-507<br>X2 | EA-510<br>X2 | EA-520<br>X2 | EA-530<br>X2 |
|--------|--------------|--------------|--------------|--------------|
| BX 40I |              |              | 826          | 797          |

Page 7 of 21

For further details about the rotary tables, see p. 12 and higher or refer to the main catalog



Rotary table installation with pL clamping claws in accordance with the operating manual



### 1 Clamping yokes

## Explanations for pp. 8 to 11

[illegible]

A diagram showing a rectangular area with dimensions labeled. The total width is  $X$ , the total height is  $Y1$ , the width of the green area is  $X2$ , and the width of the white area is  $X1$ .

[illegible]

A diagram showing a robot (black and white) positioned on a green rectangular area. The green area is defined by dimensions  $X$  (width) and  $Y$  (height). The robot's footprint is defined by dimensions  $X1$  (width) and  $Y1$  (height). The distance from the bottom edge of the green area to the bottom edge of the robot is labeled  $Y2$ .

Page 9 of 21

## Y-mounting



TIP1



TAP1




TOP1.2

### Rotary table installation using hole pattern in base plate

[illegible][illegible]

## X-mounting

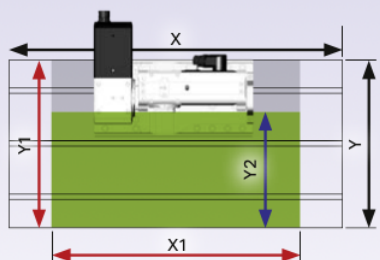

### Rotary table installation using hole pattern in base plate



**TIP1**



TAP1



TOP1.2


**Important remark:** The tilting range of 180° (order no. SWB.5xx-180) can be used under usual reserve only, because the limit switches are also used as reference switches.

[illegible][illegible]

## Overview of E-Series



More space for workpieces and fixtures

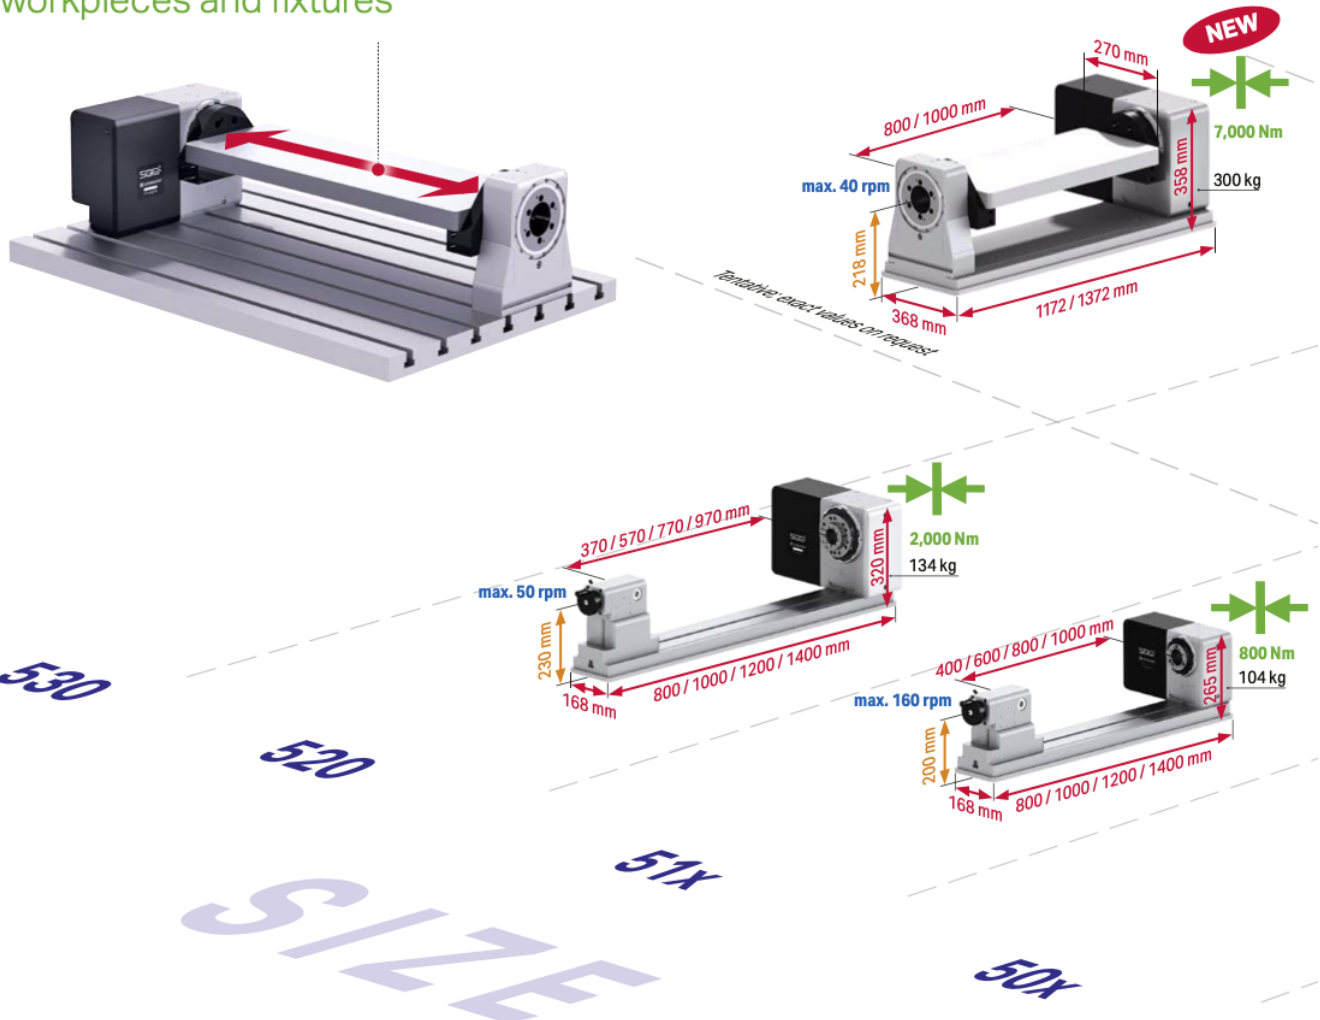


## Overview of E-Series

### News in brief

1. High speed up to **210 rpm**
2. Feed torque up to **850 Nm** (tentative)
3. Steel base plates with hole pattern (suitable for slot spacing of 100 and 125 mm)
4. Cycle time **90°** as fast as **0.21 sec.**



Weight data represent the standard load; higher weights possible, but require modification of rotational speed, acceleration and jerk limitation.

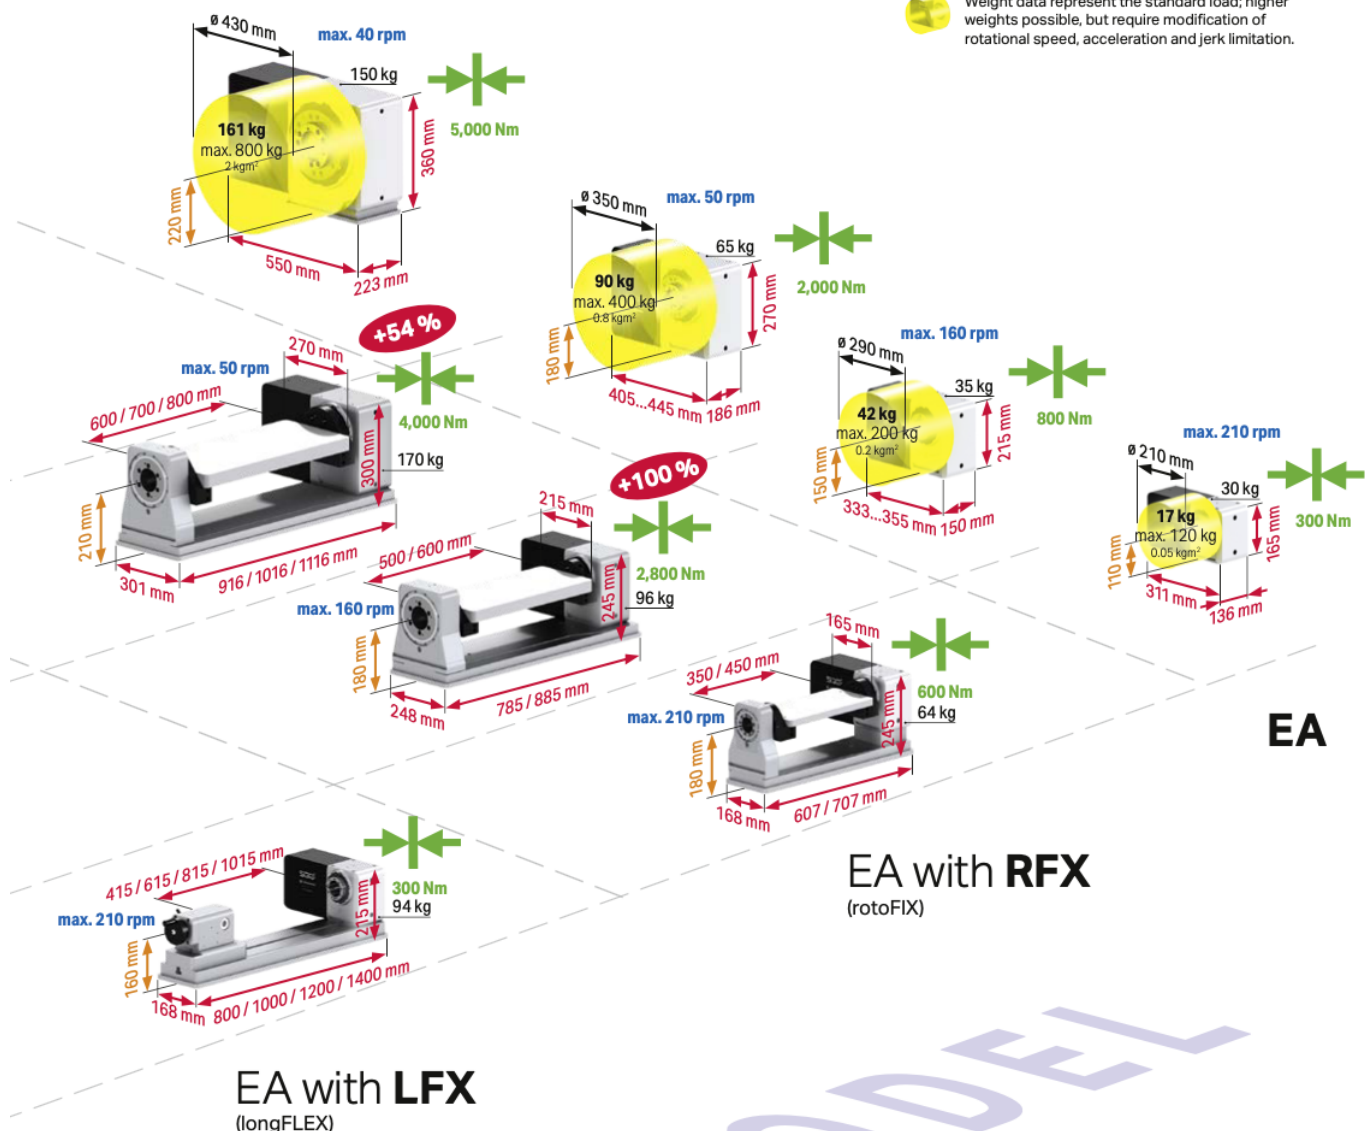


|           |                                              |
|-----------|----------------------------------------------|
| 50x       | 507 (standard) or 508 (high speed)           |
| 51x       | 510 (standard) or 511 (high speed)           |
| EA        | single-axis, single-spindle CNC rotary table |
| rotoFIX   | modular clamping yoke system                 |
| longFI FX | modular shaft clamping system                |

## Overview of T-Series



More space for  
workpiece and fixtures


**Important remark:** The tilting range of 180° (order no. SWB.5xx-180) can be used under usual reserve only, because the limit switches are also used as reference switches.

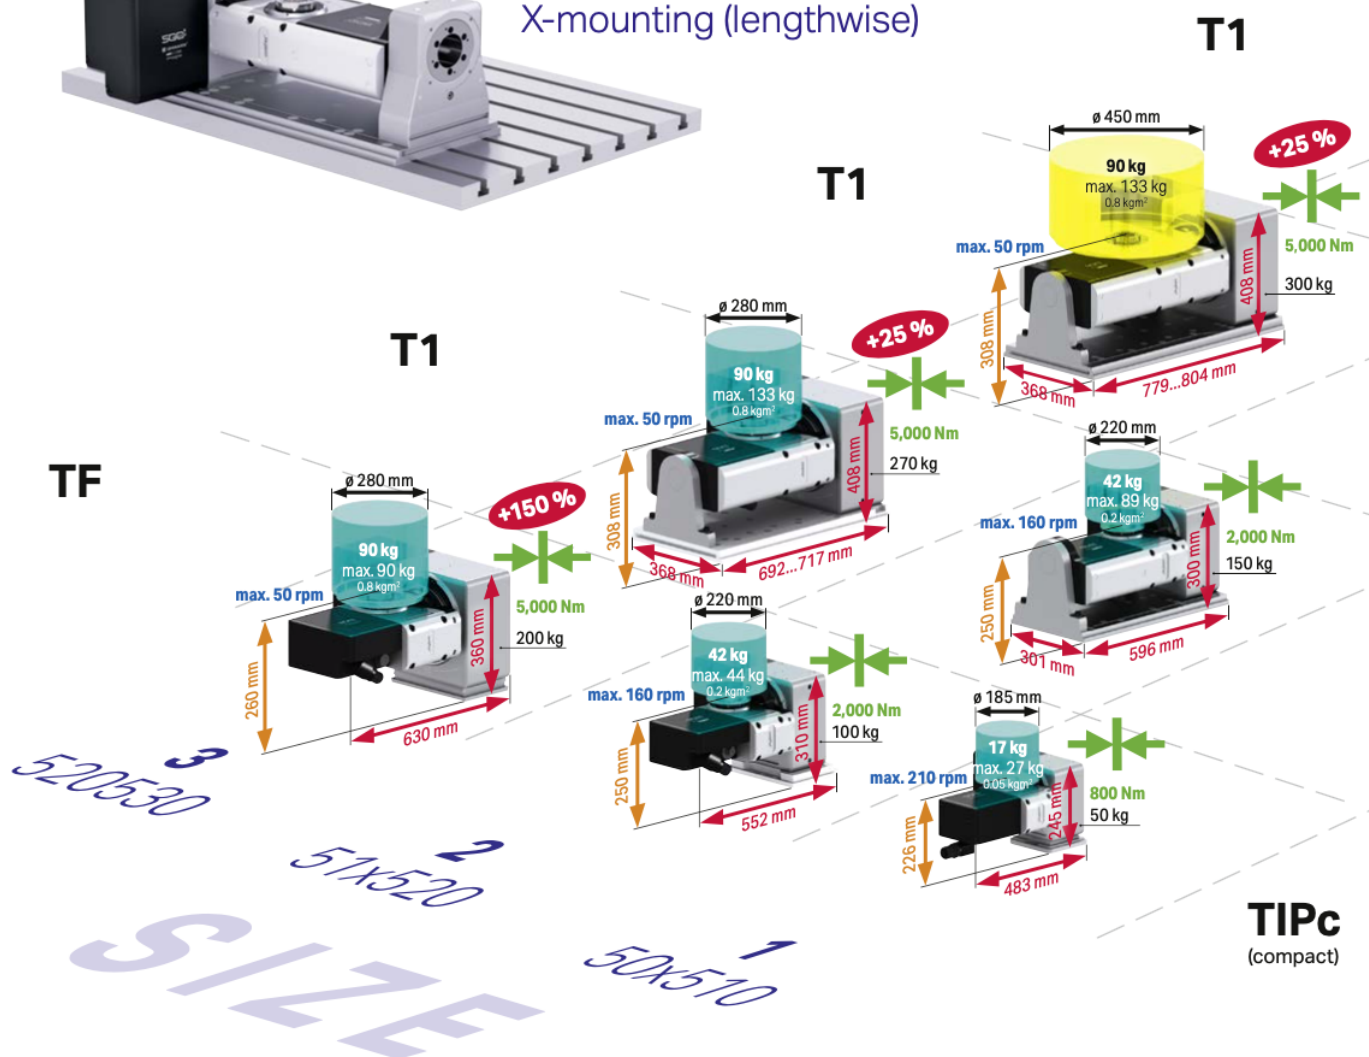

## Overview of T-Series

### News in brief


1. Up to **150 %** higher clamping torque in tilting axis
2. Fewer variant – more solution
3. Larger workpiece  $\varnothing$  possible
4. Spatially optimized arrangement of the dividing axis

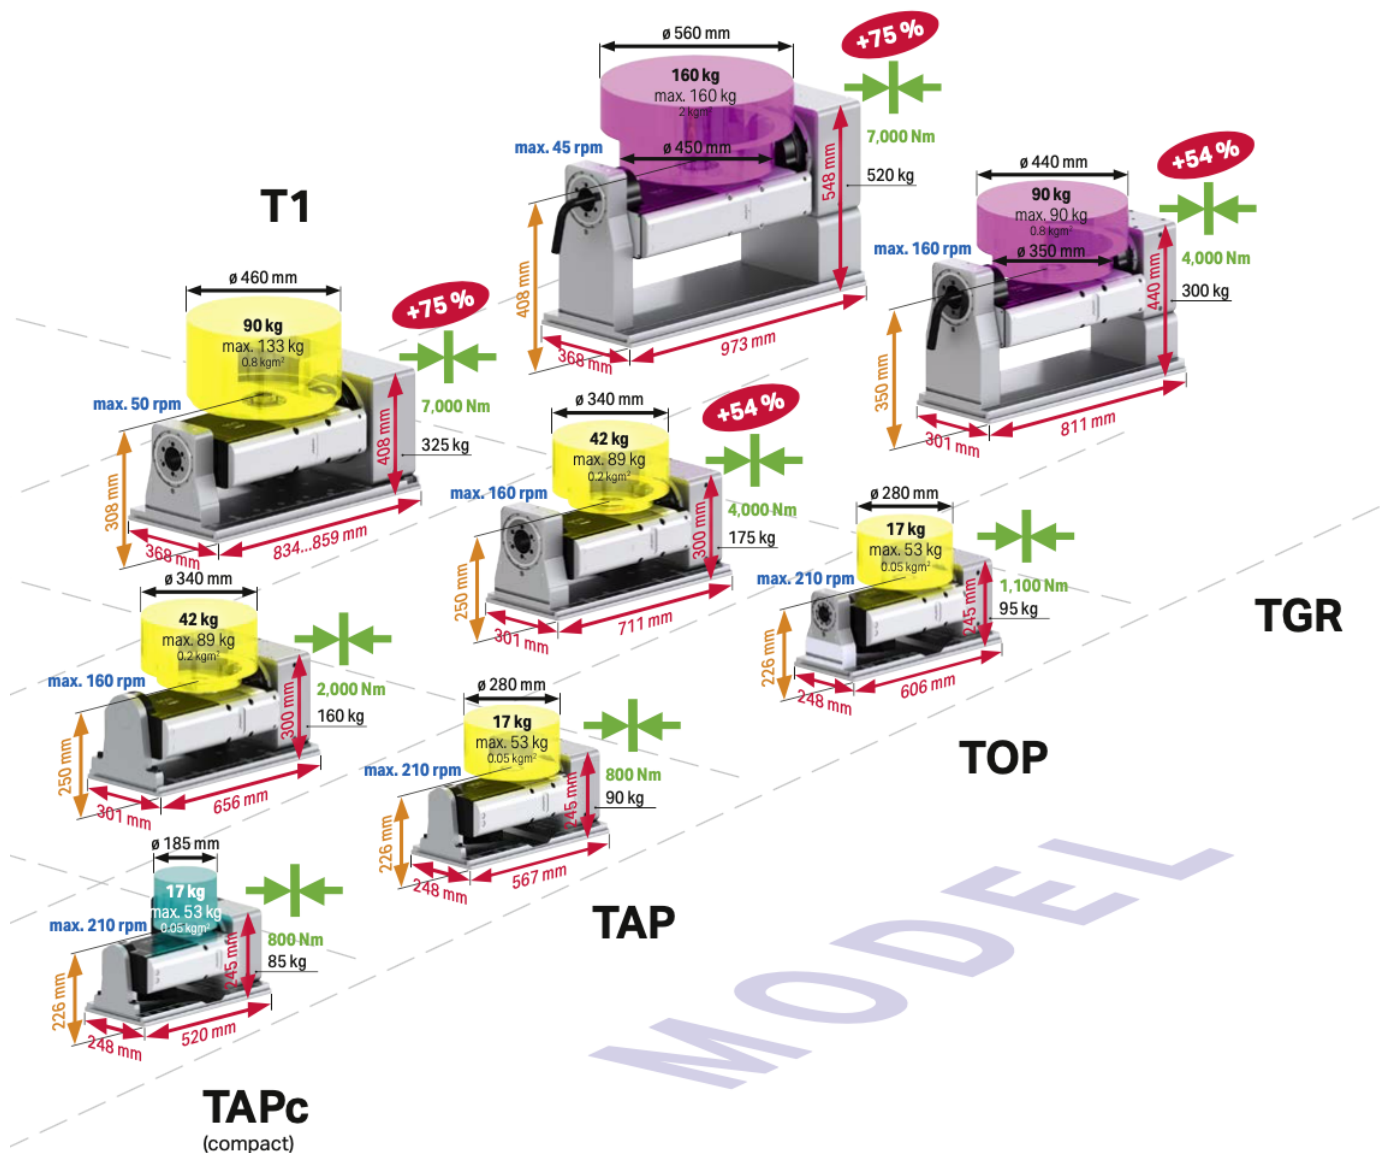

Weight data represent the standard load; higher weights possible, but require modification of rotational speed, acceleration and jerk limitation.

|        |                                                                                             |
|--------|---------------------------------------------------------------------------------------------|
| 50x510 | 508510 (standard) or 508510 (high speed)                                                    |
| 51x520 | 510520 (standard) or 511520 (high speed)                                                    |
| TIPc   | Two-axis rotary table, no counter bearing, compact                                          |
| TAPc   | Two-axis rotary table, with supporting bearing, compact                                     |
| TAP    | Two-axis rotary table, with supporting bearing                                              |
| TOP    | Two-axis rotary table, with clamped counter bearing                                         |
| TGR    | Two-axis rotary table, with clamped counter bearing, specifically for grinding applications |


## Overview of M-Series

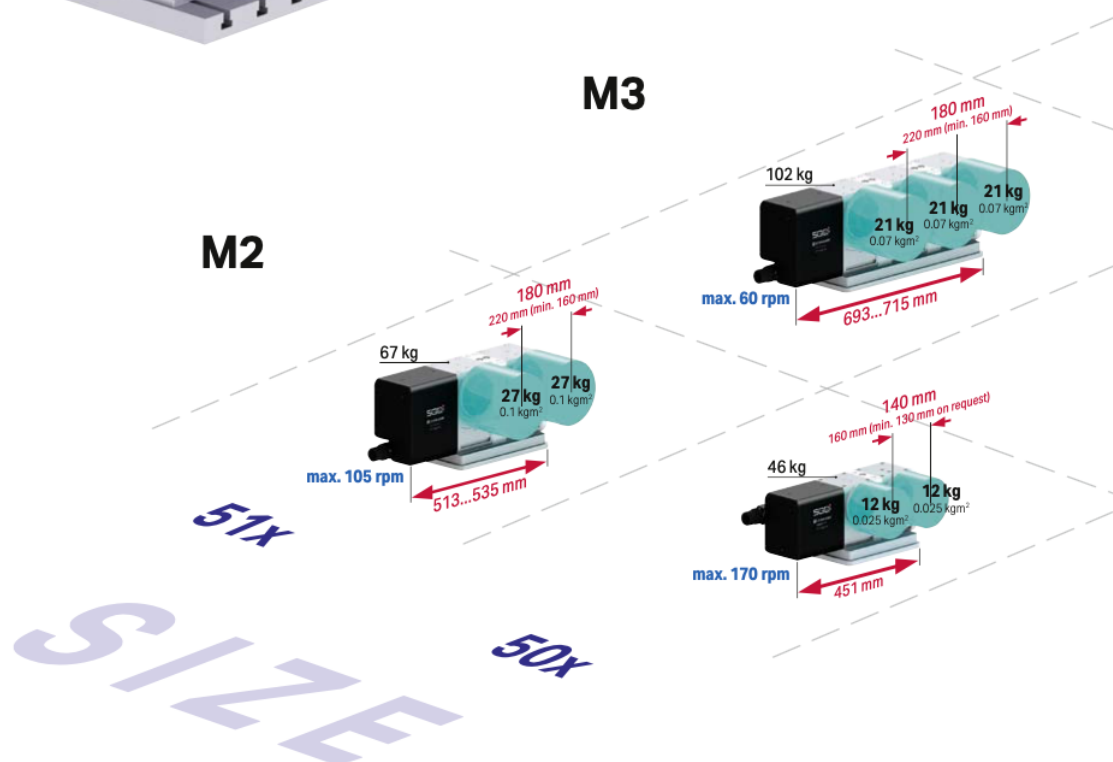

## Overview of M-Series

### News in brief

1. Up to **54 %** higher clamping torque in tilting axis
2. Fewer variant – more solution
3. Spindle distance min. **130 mm**
4. Spatially optimized arrangement of the dividing axis

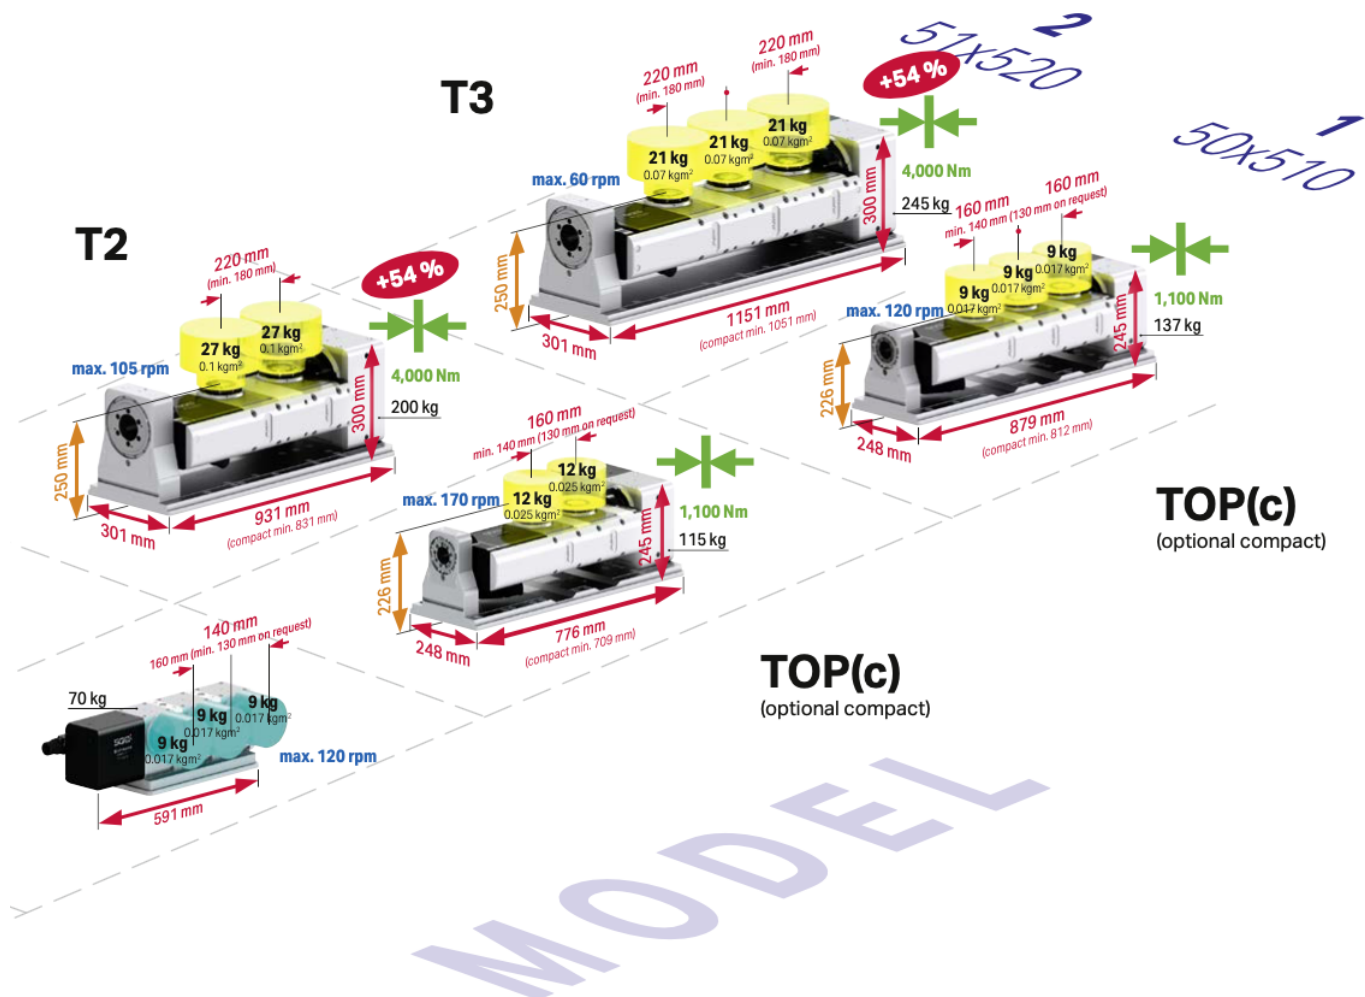

50x 507 (standard) or 508 (high speed)

51x 510 (standard) or 511 (high speed)

M2 Single-axis, multi-spindle rotary table, 2-position

M3 Single-axis, multi-spindle rotary table, 3-position

T2 Two-axis multi-spindle rotary table, 2-position

T3 Two-axis multi-spindle rotary table, 3-position

## Spindle System Accessories

Extremely wide assortment for workpiece clamping.  
Standardized interface in front and rear: maximum universality

### Spindle accessories in rear

- + Rotary unions **up to 250 bar**
- + Clamping cylinder **23 kN at 120 bar**
- + Angular position measuring systems **as precise as  $\pm 1$  arcsec**



### Spindle accessories in front



### Tailstock and counter bearing



### ripas zero point clamping system



FA-507 with ripas auto and ripas adapter

### CAPTO clamping (on request)




FA-507 with CAPTO retrofit kit

## Sales and Service

Present in over 20 countries: from sales consultation to the final service




### Services from A to Z

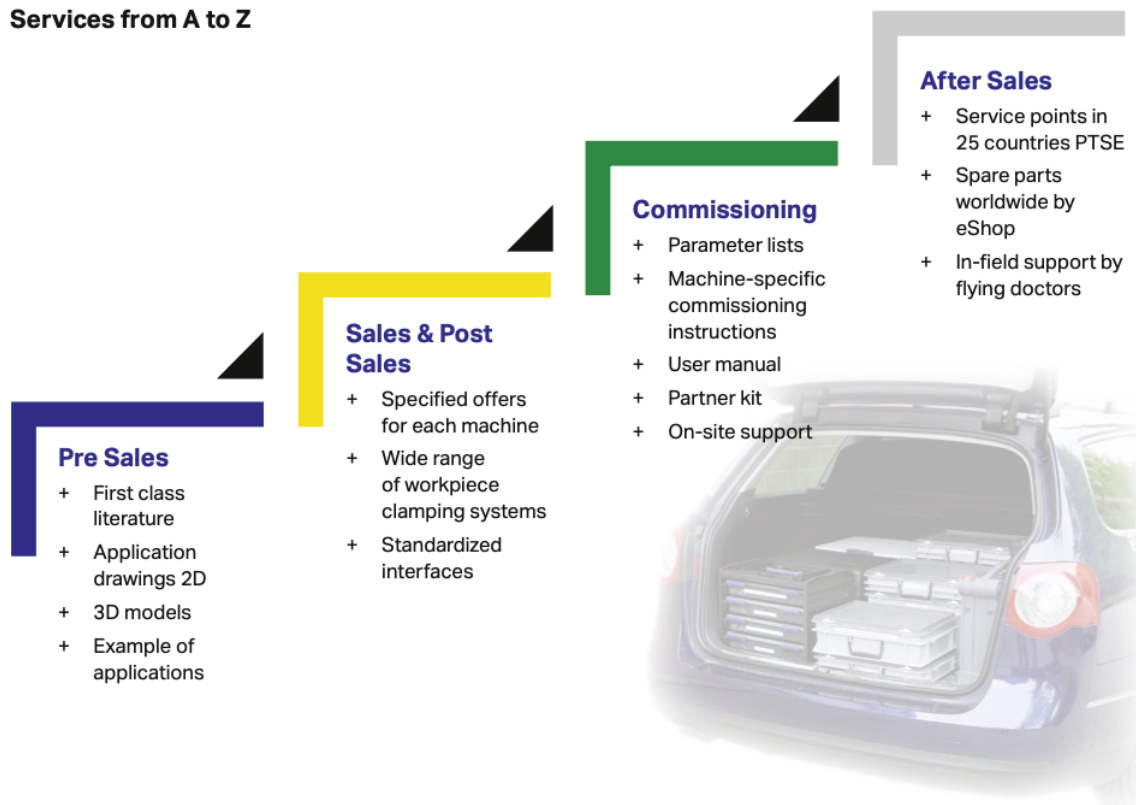

### Increase productivity – Extend lifecycle

Comprehensive and professional services throughout the product life cycle – maximum availability with consistent quality and high productivity.

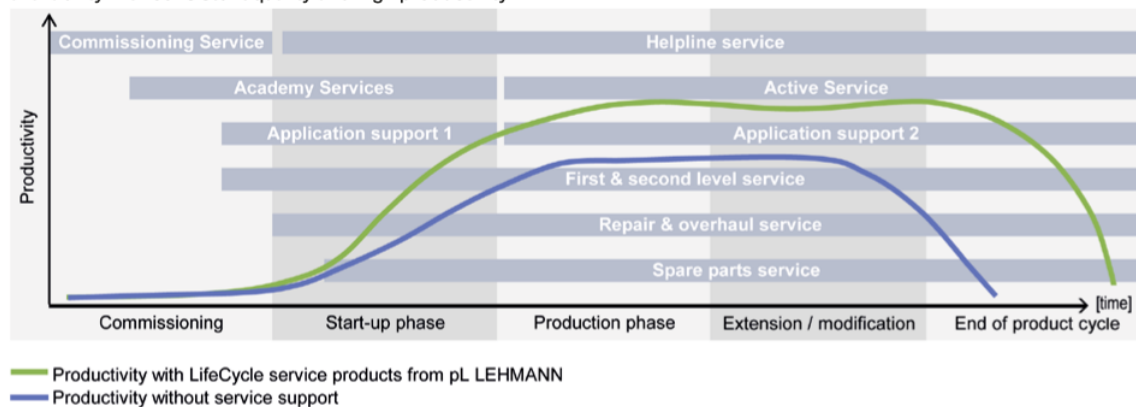

For more information please see [www.lehmann-rotary-tables.com](http://www.lehmann-rotary-tables.com)



ROTARY TABLES · PRECISION TECHNOLOGY · SOFTWARE

#### Headquarters

PETER LEHMANN AG  
CH-3552 Bärau  
Phone +41 (0)34 409 66 66  
Fax +41 (0)34 409 66 00  
pls@plehmann.com  
www.lehmann-rotary-tables.com

#### Representatives / Agencies

##### Europe

- Austria
- Benelux
- Czech Republic (vacant)
- Finland
- France
- Germany
- Hungary (vacant)
- Italy
- Norway
- Poland
- Portugal
- Russia
- Slovenia
- Spain
- Sweden
- Turkey
- UK

##### America


- Brazil
- Canada
- Mexico
- USA

##### Asia

- China
- India
- Japan
- Malaysia
- Singapore
- South Korea
- Taiwan
- Thailand
- Vietnam

##### Africa

- South Africa

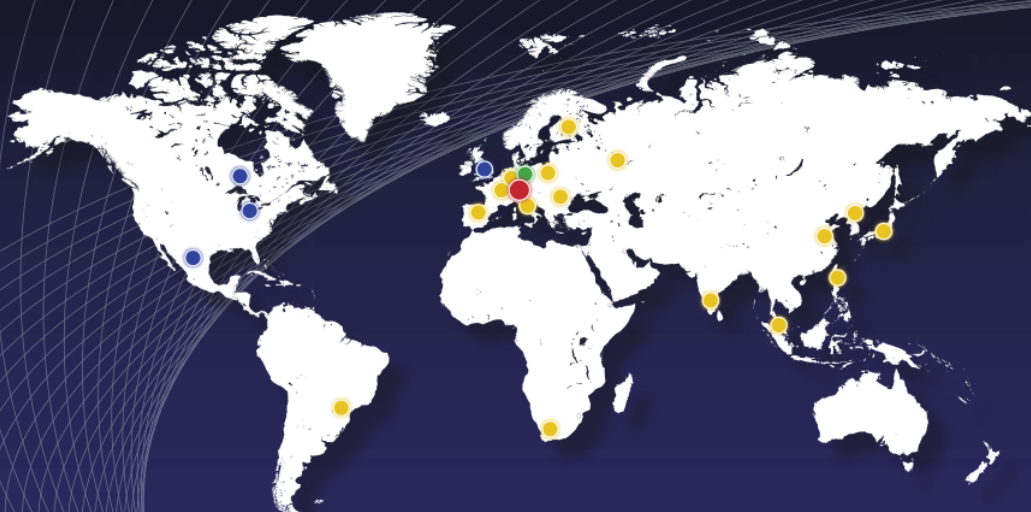

● Headquarters    
 ● direct sales partner    
 ● pL Solutions® partner    
 ● value added reseller & partner  
 More information (address, telephone number...) at [www.lehmann-rotary-tables.com](http://www.lehmann-rotary-tables.com)

Subject to change / Edition: 10/2018